

# Hevi-Bar II 1000A - 1500A Support Brackets

The Hevi-Bar II Support Brackets listed below are for 1000A or 1500A conductors. They are available in three types as listed below, and can be ordered in five different configurations:


- Bracket only (no hangers included)
- Bracket with four pre-installed hangers - standard Polycarbonate
- Bracket with four pre-installed hangers - standard Polycarbonate w/insulators
- Bracket with four pre-installed hangers - stainless steel cross-bolt
- Bracket with four pre-installed hangers - stainless steel cross-bolt w/insulators

All holes to accept hangers are 3" on-center and .56" diameter.


## Web Bracket

Mounts to vertical web of beam. Bracket is 2 1/2" wide by 1/2" thick.

Bracket Finish	Dim X Inches (mm)	Dim Y Inches (mm)	Part No. Bracket Only	Wt (lb)	Part No. - With Four Hangers Pre-Installed			
					Standard Polycarbonate	Standard Polycarbonate w/Insulators	Stainless Steel Cross-Bolt	Stainless Steel Cross-Bolt w/Insulator
Plated Steel	6.0 (152)	16.25 (413)	537552	5.6	32893	32893B	32893C	32893D
Plated Steel	9.0 (229)	19.25 (489)	537554	6.2	39923	39923B	39923C	39923D
Hot Dip Galv.	9.0 (229)	19.25 (489)	537555	6.2	32932	32932B	32932C	32932D

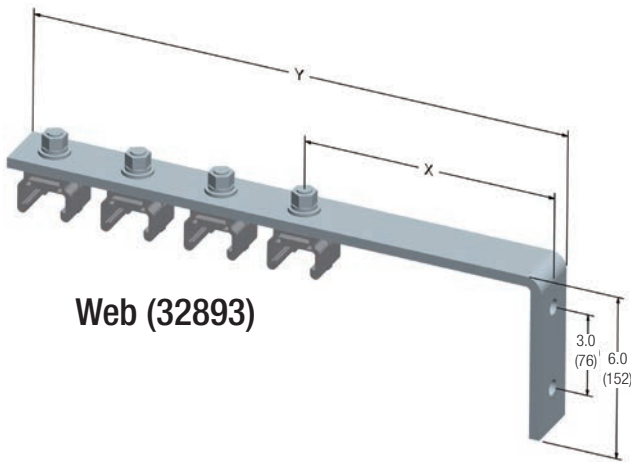

Web (32893)

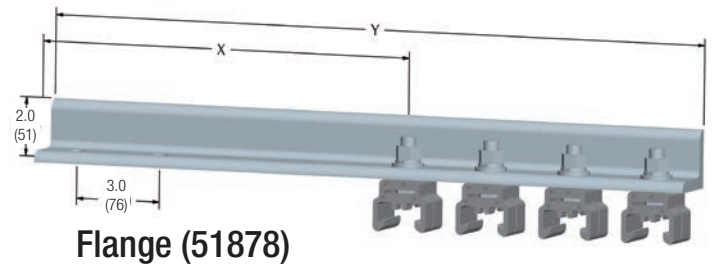

Flange (51878)

## Flange Bracket

Mounts to top flange of beam. Bracket is a 2"x 2" angle, by 3/8" thick. The first hole is 1 1/4" from the end.

Bracket Finish	Dim X Inches (mm)	Dim Y Inches (mm)	Part No. Bracket Only	Wt (lb)	Part Nos. - With Four Hangers Pre-Installed			
					Standard Polycarbonate	Standard Polycarbonate w/Insulators	Stainless Steel Cross-Bolt	Stainless Steel Cross-Bolt w/Insulator
Plated Steel	13.25 (337)	23.50 (597)	30529	8.9	51878	51878B	51878C	51878D